
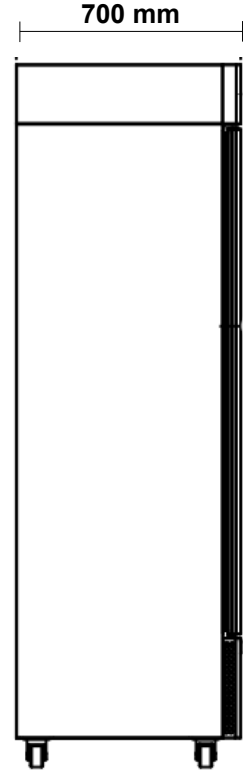


SPECIFICATIONS

CCB550-BLK/WHT

Bottom Mount Merchandiser - 1 Door
(with lightbox)

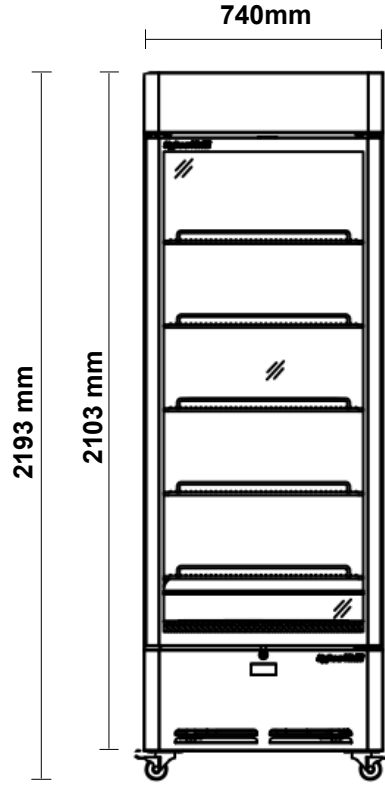

SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, bottom mounted, refrigeration unit		
Refrigerant	R290 / 105g		
Cabinet Classes	3M1, 4M1, 5M1		
Nominal capacity	500 Watts @ -5°C SST		
Energy consumption	2.592 kWh/24h/m2 (Tested to MEPS Category M1)		
Cabinet internal volume	550 litres		
Insulation	50mm thick, high density, CFC, HCFC & HFC free Zero ODP injected PUR insulation		
Cabinet temperature range	+1°C to +4°C up to 43°C ambient		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Electrical	240 Volts a.c. 50 Hz, 2.8 Amps		
Doors	1 x Self-closing, LowE, double glazed (safety glass) swing door		
Lighting	Full length internal LED light (automatic & with manual switch)		
Shelves	5 x PVC coated wire shelves (supplied with 1 x SS drip tray)		
Refrigeration	Removable 'CyberZone' refrigeration cassette		
Weight	155kg		
Lightbox	LED top-mounted lightbox (200mm)		
Cabinet dimensions	External	Internal	
	Width	740mm	640mm
	Depth	700mm	610mm
	Height	1918mm*	1630mm

OPTIONS

- Solid Doors
- Legs (Std on castors)
- Extra Shelves
- SS exterior/interior
- Black exterior/interior
- Available in R290 Hydrocarbon refrigerant

* Height excludes castors / legs & lightbox