


SPECIFICATIONS

CCB1000-BLK/WHT

Bottom Mount Merchandiser - 2 Door
(with lightbox)

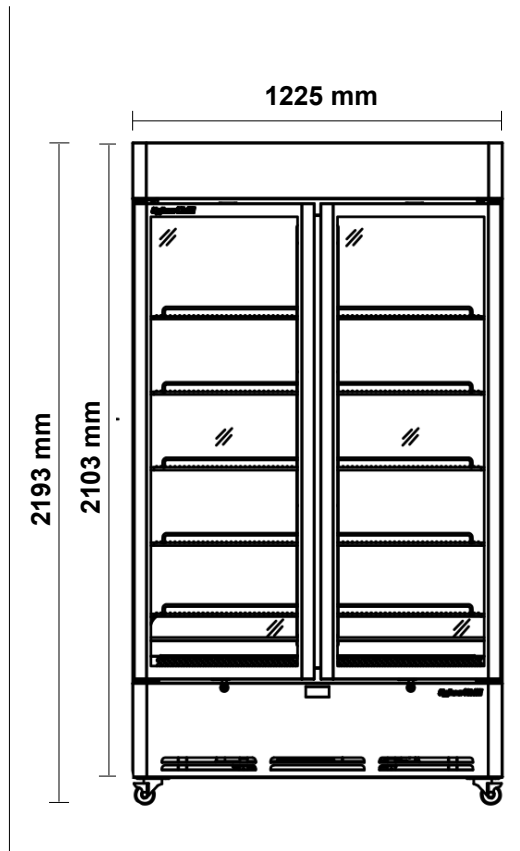

SPECIFICATIONS

| | | |
|----------------------------------|---|-----------------|
| Refrigeration system | Electronic controlled, self-contained, bottom mounted, refrigeration unit | |
| Refrigerant | R290/ 118g | |
| Cabinet Classes | 3M1, 4M1, 5M1 | |
| Nominal capacity | 590 Watts @ -5°C SST | |
| Energy consumption | 3.889 kWh/24h/m2 (Tested to MEPS Category M1) | |
| Cabinet internal volume | 1000 litres | |
| Insulation | 50mm thick, high density, CFC, HCFC & HFC free Zero ODP injected PUR insulation | |
| Cabinet temperature range | +1°C to +4°C up to 43°C ambient | |
| Drainage | Waste heat vaporiser located in service compartment (no plumbing required) | |
| Electrical | 240 Volts a.c. 50 Hz, 2.8 Amps | |
| Doors | 2 x Self-closing, LowE, double glazed (safety glass) swing door | |
| Lighting | Full length internal LED light (automatic & with manual switch) | |
| Shelves | 10 x PVC coated wire shelves (supplied with 2 x SS drip trays) | |
| Refrigeration | Removable 'CyberZone' refrigeration cassette | |
| Weight | 210kg | |
| Lightbox | LED top-mounted lightbox (200mm) | |
| Cabinet dimensions | External | Internal |
| Width | 1225mm | 1125mm |
| Depth | 700mm | 610mm |
| Height | 1918mm* | 1630mm |

OPTIONS

- Solid Doors
- Legs (Std on castors)
- Extra Shelves
- SS exterior/interior
- White exterior/interior
- Available in R290 Hydrocarbon refrigerant

* Height excludes castors / legs & lightbox