
specifications

SK1500-2

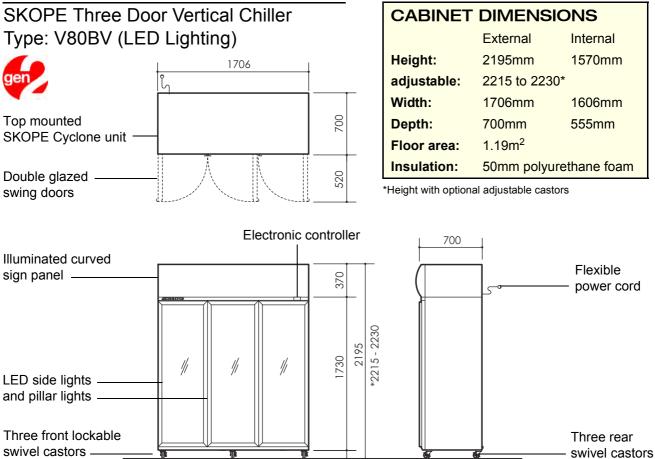

95 Standard castor height

Copyright © 2013 SKOPE Industries Limited

CABINET SPECIFICATIONS	
Refrigeration system:	Top mounted, removable SKOPE Cyclone refrigeration unit (UT43AMD)
Electronic Controller:	CAREL ir33 electronic controller
Refrigerant:	R134a / 530 g
Nominal capacity:	860 Watts
Cabinet internal volume:	1536 litres
Cabinet temperature range:	+1°C to +4°C up to 43°C ambient
Drainage:	No plumbing required
Electrical:	220-240 Volts a.c. 50 Hz, single phase supply, 6.6 Amps
Internal lighting:	2 centre pillar lights: 25 Watt T8 twin LED tube (Ø26 × 1500mm) and 2 side lights: 22 Watt T8 LED tube (Ø26 × 1500mm)
Sign lighting:	1 x 24 Watt T8 LED tube (Ø26 x 1500mm)
Internal door opening size:	2 outside doors: 1570mm high × 473mm wide and 1 inside door:1570mm high × 480mm wide
Doors:	3 self-closing, double glazed, toughened safety glass swing doors
Shelves:	10 outside shelves: 502mm wide x 460mm deep and 5 inside shelves: 571mm wide × 460mm deep adjustable height wire shelves.
Total weight:	300 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0349 Rev. 2.0 Jul. 2016



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533 Email: enquiry@skope.co.nz Website: www.skope.co.nz



