specifications


SIX PIE

SKT500X Series

1 Door (Glass), Upright Fridge

Project:

Item No:

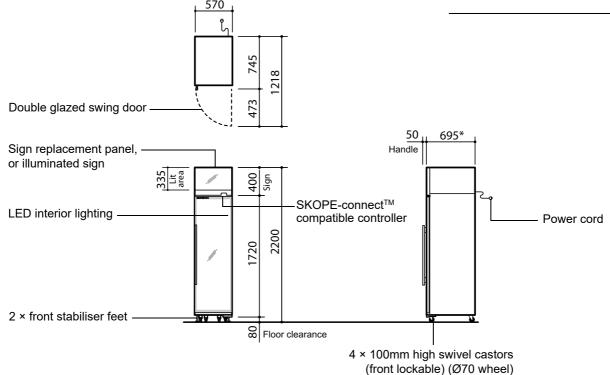

CABINET			
Model ID	SKT500XW	SKT500XW-C	SKT500XW-CX
SKOPE ID	MT55GYW	MT55BYW	MT55BXW
Doors	1 × self-closing, reversib	le, double glazed, single	Low-E, lockable, argon
	filled, toughened safety glass swing door (hinged RH)		
Internal door opening	1 × door openings: 1570mm high × 450mm wide		
Shelves	5 × adjustable height wire shelves: 445mm wide × 470mm deep		
Sign	Sign replacement panel	Illuminated sign	Illuminated sign
Material	Powdercoat galvanized	steel or stainless steel int	terior & exterior
PERFORMANCE			
Max. ambient temp.	43°C		
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)		
ELECTRICAL			
ELECTRICAL Climate class	5 (40°C/40% RH)		
	,	1 × 1400mm, 15W LED	n.a.
Climate class	,	1 × 1400mm, 15W LED n.a.	n.a. 5 × 415mm, 6W LED
Climate class Interior side lighting	1 × 1400mm, 15W LED	· ·	
Climate class Interior side lighting Interior shelf lighting	1 × 1400mm, 15W LED n.a.	n.a. 1 × 500mm, 6W LED	5 × 415mm, 6W LED
Climate class Interior side lighting Interior shelf lighting Sign lighting	1 × 1400mm, 15W LED n.a. n.a.	n.a. 1 × 500mm, 6W LED Amp plug and lead	5 × 415mm, 6W LED
Climate class Interior side lighting Interior shelf lighting Sign lighting Power cord	1 × 1400mm, 15W LED n.a. n.a. Supplied with 2.3m, 10 /	n.a. 1 × 500mm, 6W LED Amp plug and lead , single phase supply	5 × 415mm, 6W LED
Climate class Interior side lighting Interior shelf lighting Sign lighting Power cord Power supply	1 × 1400mm, 15W LED n.a. n.a. Supplied with 2.3m, 10 / 220-240 Volts a.c. 50 Hz	n.a. 1 × 500mm, 6W LED Amp plug and lead , single phase supply	5 × 415mm, 6W LED
Climate class Interior side lighting Interior shelf lighting Sign lighting Power cord Power supply Current draw	1 × 1400mm, 15W LED n.a. n.a. Supplied with 2.3m, 10 / 220-240 Volts a.c. 50 Hz	n.a. 1 × 500mm, 6W LED Amp plug and lead c, single phase supply 1.8 Amps)	5 × 415mm, 6W LED
Climate class Interior side lighting Interior shelf lighting Sign lighting Power cord Power supply Current draw REFRIGERATION	1 × 1400mm, 15W LED n.a. n.a. Supplied with 2.3m, 10 A 220-240 Volts a.c. 50 Hz 3.0 Amps (includes unit	n.a. 1 × 500mm, 6W LED Amp plug and lead 3, single phase supply 1.8 Amps) connect TM compatible)	5 × 415mm, 6W LED

DIMENSIONS				
	External	Internal		
Height	2200mm	1570mm		
Width	570mm	470mm		
Depth	745mm	554mm		
Floor area	0.43m ²	•		
Weight	140kg			
Volume		445 litres		

* Depth 695mm excludes removable door handle and door lock bracket

Dimensional tolerances				
Before installing this of tolerances:	cabinet allow the foll	owing dimensional		
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements	
Тор	300mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited



Refrigerant

Nominal capacity Heat rejection (Avg/peak)

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

140 Watts/185 Watts No plumbing required

R134a / 370g 581 Watts

Email: skope@skope.com, Website: www.skope.com

