

specifications

SK650-2




SKOPE Single Door Vertical Chiller
Type: V60BV (LED Lighting)



Top mounted
SKOPE Cyclone unit

Double glazed
swing door

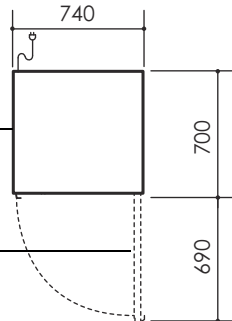


Illuminated curved
sign panel

Carel ir33
electronic
controller

LED side light

2 × front lockable swivel castors

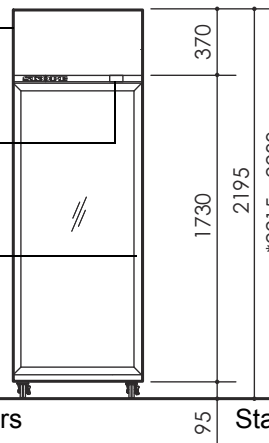


Standard castor height

CABINET DIMENSIONS

	External	Internal
Height:	2195mm	1570mm
adjustable:	2215 to 2230*	
Width:	740mm	640mm
Depth:	700mm	555mm
Floor area:	0.52m ²	
Insulation:	50mm polyurethane foam	

*Height with optional adjustable castors

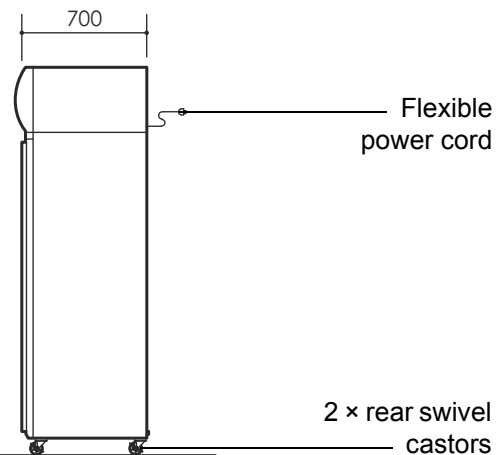

Copyright © 2013 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system:	Top mounted SKOPE Cyclone refrigeration unit (UT40AMD)
Electronic Controller:	CAREL ir33 electronic controller
Refrigerant:	R134a / 450 g
Nominal capacity:	581 Watts
Cabinet internal volume:	610 litres
Cabinet temperature range:	+1°C to +4°C up to 43°C ambient
Drainage:	No plumbing required
Electrical:	220-240 Volts a.c. 50 Hz, single phase supply, 2.7 Amps
Internal lighting:	1 × side light: 22 Watt T8 LED tube (Ø26 × 1500mm)
Sign lighting:	1 × sign light: 11 Watt T8 LED tube (Ø26 × 600mm)
Internal door opening size:	1 door opening: 1570mm high × 620mm wide
Doors:	1 × self-closing, double glazed, toughened safety glass swing door
Shelves:	5 × adjustable height wire shelves: 620mm wide × 475mm deep
Total weight:	175 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0346 Rev. 1.0 Aug. 2013



SKOPE INDUSTRIES LIMITED



New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533

Email: enquiry@skope.co.nz Website: www.skope.co.nz