

# specifications


## SK1000-2

SKOPE Two Door Vertical Chiller  
Type: V50BV (LED Lighting)



Top mounted  
SKOPE Cyclone unit

Double glazed  
swing doors



### CABINET DIMENSIONS


	External	Internal
<b>Height:</b>	2195mm	1570mm
<b>adjustable:</b>	2215 to 2230*	
<b>Width:</b>	1130mm	1030mm
<b>Depth:</b>	700mm	555mm
<b>Floor area:</b>	0.79m <sup>2</sup>	
<b>Insulation:</b>	50mm polyurethane foam	

\*Height with optional adjustable castors

Illuminated curved  
sign panel

Carel ir33  
electronic  
controller

LED side lights

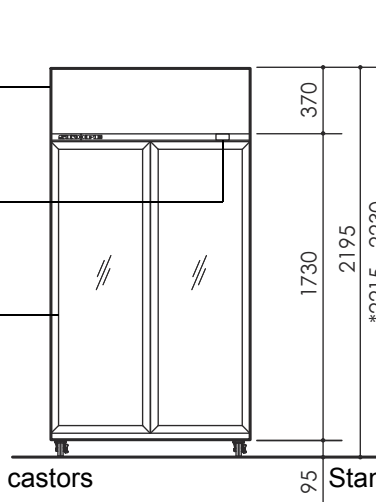

2 x front lockable swivel castors

95 Standard castor height

700

Flexible  
power cord

2 x rear swivel  
castors

Copyright © 2013 SKOPE Industries Limited

### CABINET SPECIFICATIONS

<b>Refrigeration system:</b>	Top mounted SKOPE Cyclone refrigeration unit (UT42AMD)
<b>Electronic Controller:</b>	CAREL ir33 electronic controller
<b>Refrigerant:</b>	R134a / 450 g
<b>Nominal capacity:</b>	625 Watts
<b>Cabinet internal volume:</b>	980 litres
<b>Cabinet temperature range:</b>	+1°C to +4°C up to 43°C ambient
<b>Drainage:</b>	No plumbing required
<b>Electrical:</b>	220-240 Volts a.c. 50 Hz, single phase supply, 2.9 Amps
<b>Internal lighting:</b>	2 x side lights: 22 Watt T8 LED tube (Ø26 x 1500mm)
<b>Sign lighting:</b>	1 x sign light: 12 Watt T8 LED tube (Ø26 x 900mm)
<b>Internal door opening size:</b>	2 x door openings: 1570mm high x 450mm wide
<b>Doors:</b>	2 x self-closing, double glazed, toughened safety glass swing door
<b>Shelves:</b>	5 x adjustable height wire shelves: 1009mm wide x 460mm deep
<b>Total weight:</b>	229 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0347 Rev. 1.0 Aug. 2013



**SKOPE INDUSTRIES LIMITED**



New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533

Email: enquiry@skope.co.nz Website: www.skope.co.nz